

# ECU-1251

## TI Cortex A8 Industrial Communication Gateway with 2 x LAN, 4 x COM Ports

**NEW**



CE FCC RoHS COMPLIANT PRODUCT

### Features

- TI Cortex A8 800MHz CPU
- DDR3L256MB RAM
- 1GB Micro-SD card for system storage
- 1 x Micro-SD Slot
- 4 x RS-232/485 isolated serial ports
- 2 x 10/100 Base-T Ethernet ports
- 1 x Mini-PCle for WIFI/Cellular/4G
- Support web service for remotely on-line monitoring
- Support SD card & on-line firmware update
- Support IEC-61850, IEC-60870-101/104 protocol
- Support Data logger on SD card
- Operation System: RT-Linux
- Operation Temperature -40~70°C

### Introduction

For solar power, electricity and factory related applications which require a total wireless and Ethernet communication solutions, Advantech has released the ECU-1251 RISC-based industrial communication gateway. ECU-1251 has an open platform design with Cortex A8 processor, up to four RS-232/485 isolated serial ports, two 10/100 Ethernet ports and operating temperature range of -40~70°C. With Linux operating system and open Edgelinek SDK, which enable to system integrators to develop applications which precisely fit their need.


### Specifications

		ECU-1251TL-R10AAE	ECU-1251TL-R10ABE	
<b>System</b>	CPU	TI Cortex A8, 800MHz		
	RAM	DDR3L 256MB		
	Storage	4GB Micro-SD card		
	SD Slot	1 x Micro-SD		
	Real Time Clock	Yes		
	Watchdog Timer	Yes		
	Node ID	Yes		
	TPM	NA		
<b>I/O Interfaces</b>	Serial Ports	4 x RS-232/485 isolation 3000VDC, 1 x 12-Pin Terminal Block, 50 ~ 115.2kbps		
	LAN Ports	2 x 10/100 RJ-45		
	USB Ports	1 x USB 2.0		
	Displays	NA		
	Mini-PCIE	1x Mini-PCle (Full-size), Type: WIFI/Cellular/4G, Signal: USB 2.0		
<b>WISE-Edgelinek</b>	Protocol Support	OPC-UA Client & Server, BACNet/IP Client & Server, Modbus RTU/TCP, IEC-61850*, IEC-60870-5-101, IEC-60870-5-103, IEC-60870-5-104		
	PLC driver support	Siemens/Mitsubishi/Omron/Allen-Bradley, Delta etc 200+ PLC drivers		
	Programming Support	Linux C, Python		
	Configuration Tool	WISE-EdgeLink Studio		
	Data Monitoring	2000 Tags MAX.		
	Cloud Connectivity	WISE-Edge365, MQTT, AWS, Azure, LwM2M, Google Cloud IoT Core and more		
	Database Transmission	SQL Server, MySQL, ORACLE, FTP Server		
<b>General</b>	VPN	Open VPN		
	Certification	CE, FCC, EN-62368-1, UKCA		
	Dimensions (W x D x H)	140 x 96.5 x 30mm		
	Form Factor	Small Size		
	Enclosure	SGCC		
	Mounting	Wall-Mount/DIN-Rail		
	Weight(Net)	0.6kg		
	Power Requirement	10 ~ 30 V <sub>DC</sub>		10 ~ 48 V <sub>DC</sub>
	Power Consumption	2.2W @ 24V <sub>DC</sub>		
	Power Connector	1 x 3-Pin Terminal Block		
<b>Environment</b>	Operating Temperature	-40~70°C		
	Storage Temperature	-40~85°C		
	Relative Humidity	5 ~ 95% (non-condensing)		
	Ingress Protection	IP30		
	Vibration Protection	2Grms, Random/Sine, 5 ~ 500Hz		

\*Please refer to the EdgeLink specification for further details. Activation of the IEC-61850 protocol requires an additional fee.

## Dimensions

Unit: mm

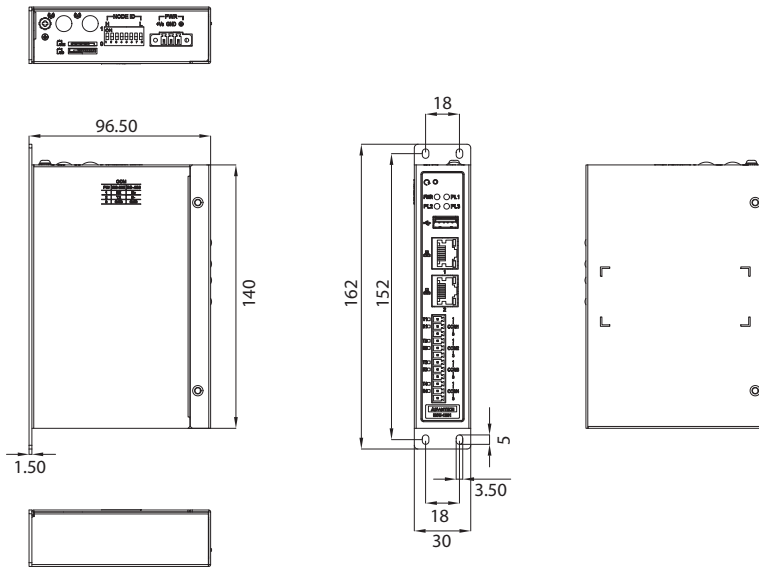

## Ordering Information

Part Number	CPU	RAM	Storage for OS	OS	Configuration Tool	TPM 2.0	LAN	COM	USB	Console	Power Requirement	Country of Origin
ECU-1251TL-R10AAE	Ti Cortex A8, 800MHz	DDR3L 256MB	4GB	Yocto	WISE-EdgeLink	N/A	2	4	1	3pin COM on board	10 ~ 30 V <sub>DC</sub>	China
ECU-1251TL-R10ABE	Ti Cortex A8, 800MHz	DDR3L 256MB	4GB	Yocto	WISE-EdgeLink	N/A	2	4	1	3pin COM on board	10 ~ 48 V <sub>DC</sub>	Taiwan

## Optional Accessory

### Wi-Fi Solution

- **96PD-RYUW131** 2.4GHz Wi-Fi Full/Half Size Mini PCIe Card
- **1750006043** SMA(M) cable, 15 cm
- **1750000318** 2dBi antenna for testing, 11 cm

### Cellular Solution (SIM card is not included)

- **96PD-EC25EFA** LTE Cat 4 Module with GNSS
- **1750006264** SMA(F) Cable, 15 cm
- **1750005865** Dipole Antenna, 11 cm

### Storage Solution

- **96FMMSDI-4G-ET-AT1** ATP 4G MICRO SD CARD I-GRD SLC(G)
- **96FMMSDI-8G-ET-AT1** ATP 8G MICRO SD CARD I-GRD SLC(G)